



Datenblatt - Fiche technique - Data sheet




11.99.5609



VALUE DisplayPort Kabel, DP ST - ST, 10,0 m

VALUE Câble DisplayPort, DP M - DP M, 10,0 m

VALUE DisplayPort Cable, DP-DP, M/M, 10.0 m

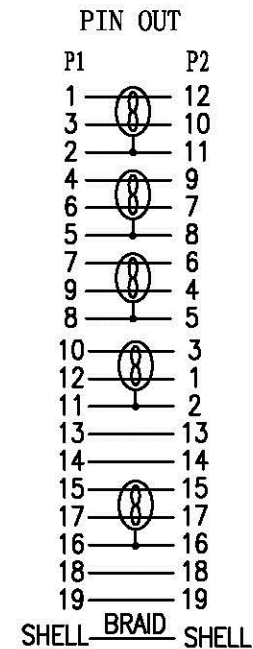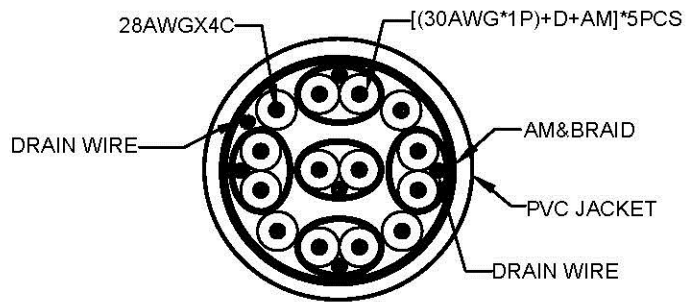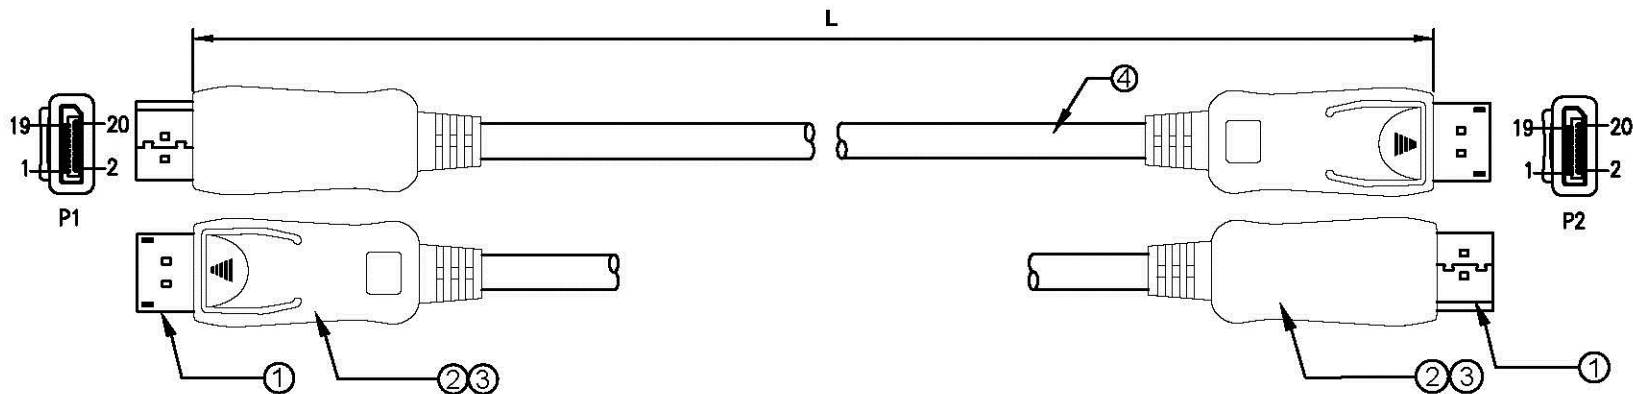

NOTE:

1. Electrical properties:

1. ALL COMPONENTS ARE RoHS COMPLIANT.
2. 100% OPEN AND SHORT TEST.
3. CONDUCTOR RESISTANCE: 3 OHMS
4. INSULATION RESISTANCE: 10 MEGOHMS.
5. HI-POT: DC200V/0.01S
6. PC TEST 4K*2K 30Hz PASS 1080P PASS

2. ROHS 2.0 and REACH

MODEL LIST

Model	Length
11.99.5604	7500mm
11.99.5609	10000mm

MATERIAL LIST

		SECOMP						
④	CABLE	(7/0.10BC*1P+7/0.10BC+ AM) * 5PCS+7/0.12BC*4C+AM+7/0.12BC+128/0.12 AL-MG+PVC, OD: 7.3±0.1mm, COLOR: BLACK	L	DRAW No.		NAME	DP CABLE 4K*2K/ 30 Hz	
③	OUTER MOLD	BLACK ABS	2	CUSTOMER		MAPE	TOLERANCE	
②	INNER MOLD	LD-PE	2	MODEL No.	11.99.560X-7.5~10M		X. ±1.00 X.X ±0.50	
①	CONNECTOR	DisplayPort MALE , GOLD PLATED PIN, Nickel PLATED SHELL	2	APPROVE BY	CHECK BY	DRAW BY	SCALE	MM
No.	PART NAME	DESCRIPTION	QTY					PAGE 1/1